



Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Cat. #: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Quantity: \_\_\_\_\_

**LED**

## VTE 4 LED Extruded Vaportight

### Features:

- High performance LED technology
- 0-10V dimming drivers standard
- Field replaceable LED boards and drivers
- Multiple hanging options, including surface, chain/cable, or pendant for easy installation
- UL approved and evaluated for daisy chaining

### Applications:

- Suitable for most commercial, industrial and institutional applications
- Warehouse
  - Manufacturing Facility
  - Food Processing
  - Stairwells
  - Car Wash

### Predicted L70 Lifetime:

- >100,000 hrs (calculated)
- >72,000 hrs (reported)
- 80% lumen maintenance @ 72,000 hrs (based on LM-80, TM-21 and in-situ laboratory testing)

### Dimensions:

- Length: 4'
- Width: 3.86"
- Depth: 3.75"

### Construction:

- (f1) rated acrylic co-extruded lens and housing - lens and housing is all one piece
- Pre-painted cold rolled steel board trays
- Gasketed end caps
- Stainless steel mounting hardware

### Certifications:


- UL 1598 listed for US and Canada, suitable for wet locations
- IP65
- IP66
- NSF
- RoHS
- DesignLights Consortium qualified on specific configurations (refer to DLC qualified products list for exact model numbers) <http://designlights.org/>

### Ambient Operating Temp:

- -30°C to 40°C

### Warranty:

- 5 year limited system warranty - see [www.UnamiLighting.com](http://www.UnamiLighting.com) for complete warranty terms and conditions

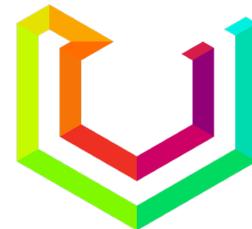

Powered by:



# VTE 4 LED Extruded Vaportight

U N A M I

## Ordering Guide:

example: VTE 4 MD UV FA 840 ZOSMD SB

Series	Length	Output	Voltage	Shielding	CRI/CCT	Mounting	Controls	Options
VTE	4		UV	FA				
VTE	4 4'	<b>VL</b> Very Low	<b>UV</b> 120-277	<b>FA</b> Frosted Acrylic	<b>835</b> 80 CRI/3500K	<b>Blank</b> Snap-On Mounting Bracket (For Surface Mounting)	<b>Blank</b> No Controls	<b>Blank</b> No Options
		<b>LW</b> Low			<b>840</b> 80 CRI/4000K	<b>SMBB</b> Snap-On Mount with Bracket Bail (For Chain or Cable Mounting)	<b>ZOSM</b> Microwave Occupancy Sensor	<b>C6</b> 6' Single Circuit Cord
		<b>MD</b> Medium			<b>850</b> 80 CRI/5000K	<b>SMBBQC</b> Snap-On Mount with Bracket Bail and 10' Quick Hang Cable Kit	<b>ZOSMD</b> 0-10V Dimming Microwave Occupancy Sensor	<b>C6(LVL)</b> C6 With Integrated Dimming Leads
						<b>SMBBQC20</b> Snap-On Mount with Bracket Bail and 20' Quick Hang Cable Kit	<b>ZIFC</b> Douglas IFC Controller With Network Capabilities <sup>(1)</sup>	<b>C10</b> 10' Single Circuit Cord
						<b>SMD</b> Snap-On Mount Drilled (For Threaded Rod Pendant, Not Included)		<b>C10(LVL)</b> C10 With Integrated Dimming Leads
								<b>D6</b> 6' Dual Circuit Cord
								<b>D10</b> 10' Dual Circuit Cord
								<b>SB</b> Safety Bail
								<b>LVL</b> 0-10V Dimming Leads for Easy Field Access
								<b>BAA</b> Buy American Act Compliant

## Notes

<sup>(1)</sup> See Page 4 for more details.

## Controls Accessories *(order separately)*



### For Douglas Controls

BT-DMSW-U-A Bluetooth 1 Zone Dimmer  
 BT-4BTSW-U-A Bluetooth 4-Button Wall Station  
 BT-8BTSW-U-A Bluetooth 8-Button Wall Station


# VTE 4 LED Extruded Vaportight

U N A M I

## Performance Data:

Catalog #	QPL/UL Reference #	Watts	Lumens (835)	LPW (835)	Lumens (840)	LPW (840)	Lumens (850)	LPW (850)
VTE 4 VL UV FA 8xx	EVT 4 VL UV FA 8xx	31	3603	117.1	3722	121.0	3834	124.6
VTE 4 LW UV FA 8xx	EVT 4 LW UV FA 8xx	41	4558	111.0	4709	114.7	4850	118.1
VTE 4 MD UV FA 8xx	EVT 4 MD UV FA 8xx	52	5650	109.4	5837	113.0	6012	116.4

## Mounting:

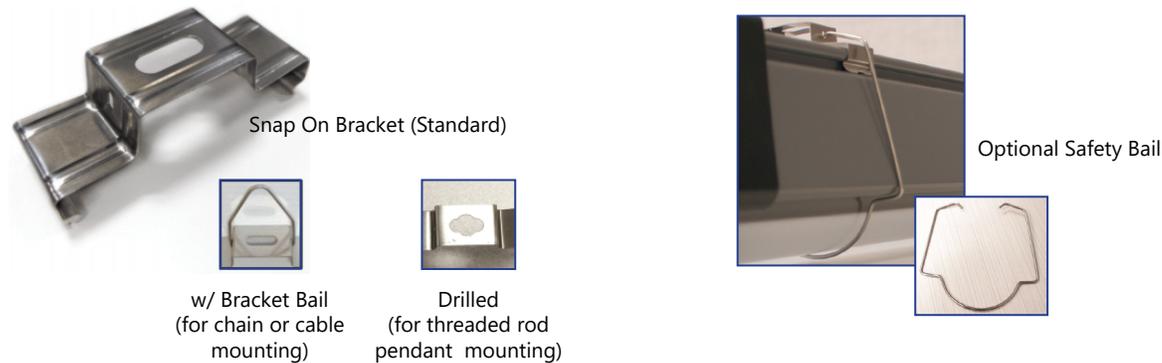

## Photometric Data:

### VTE 4 MD UV FA 850

Test No.: LLIA001045-001A

Luminaire Lumens: 6,012 lm

Luminaire Watts: 51.7W


Efficacy: 116.4 LPW

Spacing Criterion (0-180): 1.22

Spacing Criterion (90-270): 1.32

### Luminance Data (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	20478	17177	17153
55	18733	15201	15423
65	16480	13076	13589
75	12701	11014	11805
85	5133	9349	10347

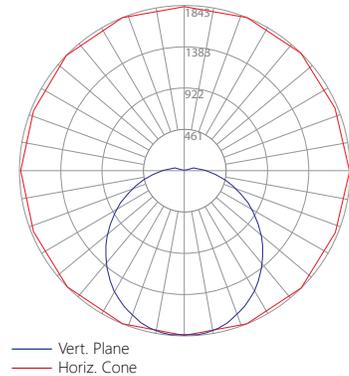

### Zonal Lumen Summary

Zone	Lumens	%Fixt
0-20	669.65	11.10
0-30	1420.45	23.60
0-40	2325.85	38.70
0-60	4147.60	69.00
0-80	5378.96	89.50
0-90	5694.83	94.70
90-120	311.71	5.20
90-130	316.92	5.30
90-150	316.93	5.30
90-180	316.93	5.30
0-180	6011.76	100.00

### Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80				70				50				30			
	70	50	30	10	70	50	30	10	50	30	10	50	30	10		
0	118	118	118	118	114	114	114		108	108	108	102	102	102		
1	106	100	95	91	102	98	93	89	92	89	85	87	84	82		
2	96	87	79	73	92	84	77	72	80	74	69	76	71	67		
3	87	76	67	60	84	74	66	59	70	63	57	66	61	56		
4	79	67	58	51	77	65	57	50	62	55	49	59	53	47		
5	73	60	50	43	70	58	49	43	55	48	42	53	46	41		
6	67	54	44	38	65	52	44	37	50	42	37	48	41	36		
7	62	48	39	33	60	47	39	33	45	38	32	43	37	32		
8	58	44	35	30	56	43	35	29	41	34	29	40	33	28		
9	54	41	32	27	52	40	32	26	38	31	26	37	30	25		
10	51	37	29	24	49	37	29	24	35	28	23	34	28	23		

Tested in accordance with IES standards utilizing absolute photometry per LM-79-08

# VTE 4 LED Extruded Vaportight

## Douglas Lighting Controls, Inc.: Intelligent Fixture Controller (IFC)

The VTE can be equipped with the Douglas Bluetooth Intelligent Fixture Controller (IFC).

- 0-10V dimming with dim-to-off
- Bluetooth beacon for digital ceiling, IoT and location service strategies
- 150-foot clear line of sight, 50 feet through standard walls
- May be used with dual-channel, tunable white LED drivers providing auxiliary power and dim-to-off capability
- Commissioning through Douglas Lighting Controls, Inc. app from Apple app store
- Listed for emergency control when used on dedicated emergency power bus



## CheckLight® Energy Management System

Douglas controls can be integrated with the CheckLight® Energy Management system. This system can help you uncover energy conversion opportunities, create conservation strategies, analyze lighting load inefficiencies, and make configuration changes from anywhere with Douglas' user-friendly interface. You can get measurements, reports, and control your system from a web-based application.

CheckLight® has the capability to look at different facilities within a portfolio and use data benchmarks to compare building performances.

- Find energy conservation opportunities
- Create energy saving strategies
- Analyze load inefficiencies
- Optimize energy management

© 2021 Douglas Lighting Controls, Inc. for all Douglas content and images. The Bluetooth® word, mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Douglas Lighting Controls is under license. Other trademarks and trade names are those of their respective owners.

## Microwave Occupancy Sensor (ZOSM)

The Leviton OSM3D-V1W (or equivalent) detects motion through low density materials using high frequency electromagnetic waves. This means it can sit discretely behind the lens in the VTE. The ZOSM features automatic switching based on motion and ambient light level.

