



Project: \_\_\_\_\_

Location: \_\_\_\_\_

Cat. #: \_\_\_\_\_

Type: \_\_\_\_\_

Quantity: \_\_\_\_\_

# LED

## PLL 14 LED Lay-In

### Features:

- High performance LED technology
- 0-10V dimming drivers standard
- Field replaceable LED boards and drivers
- Frosted diffuser optimized to balance efficiency and aesthetics
- Available in a wide variety of lumen outputs for maximum flexibility
- Low profile and lightweight housing allows for easy installation
- Advanced controls available

### Applications:

Suitable for most commercial and institutional applications

- Office
- Retail
- Classrooms
- Healthcare Facilities

### Predicted L70 Lifetime:

- Up to 189,000 hrs (calculated)  
*(L70 information for specific configurations available upon request)*
- For BAA compliant configurations - up to 189,000 hrs (calculated)

### Construction:

- Die-formed heavy-gauge cold rolled steel ballast housing with precision brake formed aluminum LED tray
- Frosted Acrylic Diffuser
- White enamel finish


### Certifications:

- UL 1598 listed for US and Canada, suitable for damp locations
- DesignLights Consortium qualified on specific configurations (refer to DLC qualified products list for exact model numbers) <http://designlights.org/>

### Warranty:

- 5 year limited system warranty
- see [www.UnamiLighting.com](http://www.UnamiLighting.com) for complete warranty terms and conditions
- 10 year warranty option available on specific models  
*(Not available on all models. Certain conditions apply. Consult factory or sales representative for details.)*

**10** YEAR  
EXTENDED  
WARRANTY  
AVAILABLE ON  
CERTAIN MODELS



# PLL 14 LED Lay-In

## Ordering Guide:

example: PLL 14 MD UV FA 835

Series	Size	Output	Voltage	Shielding	CRI/CCT	Mounting	Controls	Options			
PLL	14			FA							
PLL	14 1' x 4'	<b>SL</b> Super Low	<b>UV</b> 120-277	<b>FA</b> Frosted Acrylic	<b>830</b> 80 CRI/3000K	<b>Blank</b> None	<b>Blank</b> No Controls	<b>Blank</b> No Options			
		<b>VL</b> Very Low	<b>34</b> 347V		<b>835</b> 80 CRI/3500K				<b>SMK</b> Surface Mount Kit	<b>ZSOL</b> Leviton Programmable PIR Occupancy/Daylight Harvesting Sensor <sup>(1)</sup>	<b>EXT10</b> 10-Year Extended Warranty <sup>(4)</sup>
		<b>LW</b> Low			<b>840</b> 80 CRI/4000K				<b>FIK</b> Frame-in Kit	<b>ZES2</b> Philips EasySense Occupancy/ Daylight sensor with advanced grouping <sup>(2)</sup>	<b>SD</b> Step Dimming
		<b>MD</b> Medium			<b>850</b> 80 CRI/5000K					<b>ZES3</b> Philips EasySense Occupancy/ Daylight sensor for Zigbee networks <sup>(2)</sup>	<b>W6</b> 6' Whip
		<b>HI</b> High								<b>ZES3</b> Philips EasySense Occupancy/ Daylight sensor for Zigbee networks <sup>(2)</sup>	<b>W10</b> 10' Whip
							<b>ZIFS</b> Douglas IFS Sensor with Dimming/ Occupancy/Daylight Harvesting with Newtork Capabilities <sup>(3)</sup>	<b>EM1</b> Emergency Kit - 12W 1200 nominal lumens <sup>(5)</sup>			
							<b>ZIFC</b> Douglas IFC Controller with Newtork Capabilities <sup>(3)</sup>	<b>F</b> Fuse			
							<b>ZENLO</b> Enlighted One Micro Sensor with Dimming/Occupancy/Daylight Harvesting <sup>(3)</sup>	<b>GC</b> Grid Clip			
							<b>ZENLC</b> Enlighted Connected Micro Sensor with Dimming/Occupancy/Daylight Harvesting <sup>(3)</sup>	<b>SDT(347V)</b> 347V to 277V Step Down Transformer			
							<b>ZENLI</b> Enlighted IoT Micro Sensor with Dimming/Occupancy/Daylight Harvesting <sup>(3)</sup>	<b>AR</b> Plenum Ceiling Air Return			
								<b>LVL</b> 0-10V Dimming Leads for Easy Field Access			
								<b>BAA</b> Buy American Act Compliant			

## Notes

- <sup>(1)</sup> See page 4 for more details.
- <sup>(2)</sup> 120-277V only. See page 4 for more details.
- <sup>(3)</sup> See page 5 for more details.
- <sup>(4)</sup> Not available on all models. Certain conditions apply. Consult factory or sales representative for details.
- <sup>(5)</sup> 120-277V only / 0°C-50°C ambient.

## Controls Accessories (order separately)



**For Leviton Programmable Sensor (OS)**  
ZLS0R-RA1 IR Programming Remote



**For Philips EasySense Controls**  
ZBT-S1AWH Illumra Single Rocker Self-Powered  
Zigbee Wall Switch  
ZBT-S2AWH Illumra Double Rocker Self-Powered  
Zigbee Wall Switch




**For Douglas Controls**  
BT-DMSW-U-A Bluetooth 1 Zone Dimmer  
BT-4BTSW-U-A Bluetooth 4-Button Wall Station  
BT-8BTSW-U-A Bluetooth 8-Button Wall Station



**For Enlighted Controls**  
WS-2-00 Enlighted Remote Control Wall Switch  
(for Enlighted Connected & IoT)  
WS-2-00-IL Enlighted Remote Control Wall Switch  
(for Enlighted One)

## PLL 14 LED Lay-In

### Schematic:

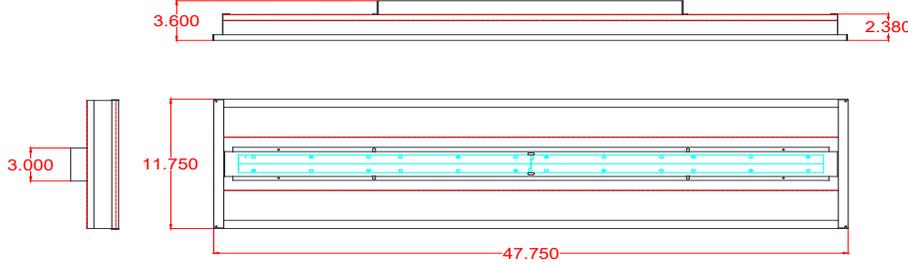

### Performance Chart:

Catalog #	QPL/UL Reference #	Watts	Lumens (830)	LPW (830)	Lumens (835)	LPW (835)	Lumens (840)	LPW (840)	Lumens (850)	LPW (850)
PLL 14 SL UV FA xxx	FFL 14 SL UV FA xxx	18	2247	124.8	2283	126.8	2360	131.1	2455	136.4
PLL 14 VL UV FA xxx	FFL 14 VL UV FA xxx	25	2949	120.4	2996	122.3	3098	126.5	3222	131.5
PLL 14 LW UV FA xxx	FFL 14 LW UV FA xxx	28	3663	130.8	3721	132.9	3848	137.4	4002	142.9
PLL 14 MD UV FA xxx	FFL 14 MD UV FA xxx	36	4489	124.7	4559	126.7	4715	131.0	4904	136.2
PLL 14 HI UV FA xxx	FFL 14 HI UV FA xxx	50	6045	121.9	6140	123.8	6350	128.0	6604	133.1

### Photometric Data:

#### PLL 14 SL UV FA 830

Test No.: LLIA000690-004

Luminaire Lumens: 2,247 lm

Luminaire Watts: 18.0W


Efficacy: 124.8 LPW

Spacing Criterion (0-180): 1.26

Spacing Criterion (90-270): 1.30

#### Luminance Data (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	2377	2561	2655
55	2105	2440	2577
65	1759	2258	2428
75	1369	2011	1396
85	929	961	547

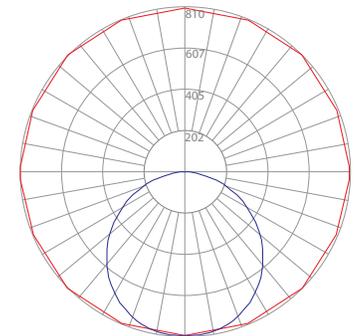

#### Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80				70				50				30			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106		
1	109	104	100	97	106	102	98	95	98	95	92	94	91	89		
2	99	91	84	79	97	89	83	78	86	81	76	82	78	74		
3	91	80	72	66	88	79	71	65	76	69	64	73	67	63		
4	83	71	62	56	81	70	62	55	67	60	54	65	59	54		
5	76	63	55	48	74	62	54	48	60	53	47	58	52	47		
6	70	57	48	42	68	56	48	42	54	47	41	53	46	41		
7	65	52	43	37	64	51	43	37	49	42	37	48	41	36		
8	61	47	39	33	59	47	38	33	45	38	33	44	37	32		
9	57	43	35	30	55	43	35	30	42	34	29	41	34	29		
10	53	40	32	27	52	39	32	27	38	31	27	38	31	27		

#### Zonal Lumen Summary

Zone	Lumens	%Fixt
0-20	295.36	13.10
0-30	627.90	27.90
0-40	1028.43	45.80
0-60	1806.01	80.40
0-80	2217.45	98.70
0-90	2246.91	100.00
90-120	0.00	0.00
90-130	0.00	0.00
90-150	0.00	0.00
90-180	0.00	0.00
0-180	2246.91	100.00

Tested in accordance with IES standards utilizing absolute photometry per LM-79-08

# PLL 14 LED Lay-In

## ZSOL option: Leviton Intellect Solo Sensor

The PLL can be equipped with an integrated Leviton Intellect Solo Sensor ("ZSOL" option). This is a 0-10V dimming Passive Infrared (PIR) occupancy and daylight harvesting sensor.

- Other features:
- Partial-on
  - Partial-off
  - 8' to 10' mounting height
  - IP20 rated
  - Detection angle: 120 degrees
  - IR remote available for programming sensor from the floor (sold separately)
  - Can be used to comply with IECC, ASHRAE 90.1 and 2019 Title 24, Part 6 dimming, occupancy/vacancy sensing and daylight harvesting requirements.



## PLL available with Philips EasySense Sensors

- Simple, cost effective way to add controls to every luminaire in order to maximize energy savings and address code-compliance strategies
- Occupancy sensing, daylight harvesting, and task tuning in one device
- Reduces installation time and eliminates the need to wire sensors outside the fixture in the ceiling
- Title 20 compliant
- Enables auto-off/manual-on and auto-off/partial-on application
- Easy field configuration from floor via smartphone with Easysense App
- Factory can pre-set max light levels



## ZES2 (EasySense Fixture-Mount Sensor SNS200 with Philips SR Xitanium driver)


- Independent per-fixture control: Occupancy, Daylight Harvesting, Task Tuning
- Occupancy Sharing
  - Fixtures within a group can be programmed to remain at prescribed light levels so long as occupancy is detected anywhere in the group
- Scene Setting
- Advanced grouping to Illumra ZBT-S1AWH or ZBT-S2AWH wireless wall switch
  - Single (S1AWH) or Dual (S2AWH) Rocker Self-Powered Light Switch
  - Up to 40 sensors can be grouped to a single switch
  - Functions: On/Off, Dim-Up/Dim-Down, Scene 1, Scene 2
- DLC listed



## ZES3 (EasySense Fixture-Mount Sensor for Networks SNS300 with Philips SR Xitanium driver)

- Occupancy & daylight sensing in one device
- Designed for applications with centralized lighting control through Zigbee wireless technology
  - Compatible with qualified third-party lighting control systems or building management systems (BMS)
  - Provides a simple solution to actively manage and control energy usage, while remotely adjusting light settings and determining service needs
  - Provides fixture-specific information into networks for centralized control and enables functionality such as energy monitoring, scheduling, and load shedding.
  - **Note:** SNS300 does not provide stand-alone operation based on occupancy or daylight. Status is provided to the network system for centralized control and command.

### Detection Area:

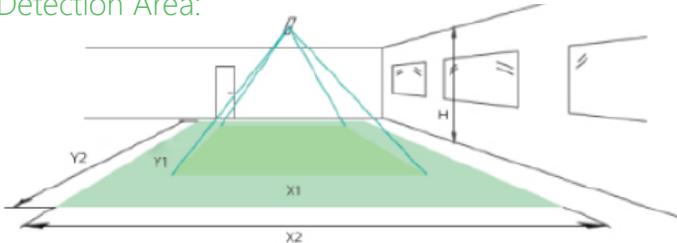

Height	Minor Movement		Major Movement	
H	X1	Y1	X2	Y2
10'	12'	9'	18'	12'

- Longer dimension of detection area (X1, X2) is parallel to longer dimension of EasySense
- Minor movement (person moving ≤ 3.0' per second)
  - Major movement (person moving ≥ 3.0' per second)

© 2022 Signify Holding for all EasySense content and images

## PLL 14 LED Lay-In

### Douglas Lighting Controls, Inc.: Cloud-based controls

The PLL can be equipped with the Douglas Bluetooth Intelligent Fixture Sensor (IFS) as well as the Intelligent Fixture Controller.



IFS

- Occupancy, vacancy, partial-on and partial-off
- Occupancy timeout adjustable from 5 to 90 minutes
- Primary and secondary daylight harvesting
- Up to 16.4' (5m) mounting height



IFC

- Listed for emergency control when used on dedicated emergency power bus
- Same occupancy and daylight controls as the IFS when networked with one or more IFS sensors

#### Available with both IFS and IFC:

- 0-10V dimming with dim-to-off
- Bluetooth beacon for digital ceiling, IoT and location service strategies
  - 150-foot clear line of sight, 50 feet through standard walls
- May be used with dual-channel, tunable white LED drivers providing auxiliary power and dim-to-off capability
  - Commissioning through Douglas Lighting Controls, Inc. app from Apple app store
  - **Note:** Additional equipment required for IoT capabilities

### CheckLight® Energy Management System

Douglas controls can be integrated with the CheckLight® Energy Management system. This system can help you uncover energy conversion opportunities, create conservation strategies, analyze lighting load inefficiencies, and make configuration changes from anywhere with Douglas' user-friendly interface. You can get measurements, reports, and control your system from a web-based application.

CheckLight® has the capability to look at different facilities within a portfolio and use data benchmarks to compare building performances.

- Find energy conservation opportunities
- Create energy saving strategies
- Analyze load inefficiencies
- Optimize energy management

### Enlighted: All-in-one sensors, upgradeable systems

Enlighted's SMART Micro Sensor is an all-in-one unit: task tuning, high-end trimming, daylight harvesting, and occupancy/vacancy detection. Max installation height is 15 feet.



Enlighted sensors come standard with the Enlighted One system (the "ZENLO" option). Enlighted Connected ("ZENLC") offers even more options. The Enlighted IoT ("ZENLI") option allows the full implementation of Enlighted's services. Each system can be fully upgraded to the next tier in the future. So if you start with Enlighted One but want to add energy reporting or building management systems integration in the future, you can.


Enlighted Capabilities*	Enlighted One (ZENLO)	Enlighted Connected (ZENLC)	Enlighted IoT (ZENLI)
Motion and Switch Groups	✓	✓	✓
Daylight Harvesting	✓	✓	✓
Schedule Lighting		✓	✓
Energy Reporting & Optimization		✓	✓
Environment Data & Lighting Controls API		✓	✓
Building Management System Integration		✓	✓
Where & Space Applications			✓
Location & Occupancy APIs & Beacons			✓
Future App & API Ready			✓

**Note:** Additional equipment required ZENLC and ZENLI

### Real-time data analytics

Enlighted's control units compile data in real-time, which can be viewed via the Energy Manager. The Energy Manager is part of the Enlighted Connected and Enlighted IoT configurations.

- Real-time measurements and verification of energy savings
- Space analytics - data can be compiled into motion trails and heat maps
- Analyze traffic density and congestion in a space

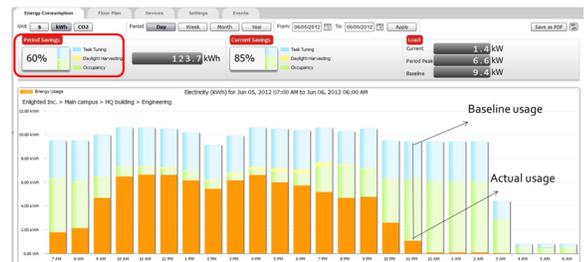

© 2022 Enlighted for all Enlighted content and images.

© 2022 Douglas Lighting Controls, Inc. for all Douglas content and images. The Bluetooth® word, mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Douglas Lighting Controls is under license. Other trademarks and trade names are those of their respective owners.